


## FoxESS HV2600 BATTERY MODULE

### HIGH VOLTAGE BATTERIES FROM FoxESS

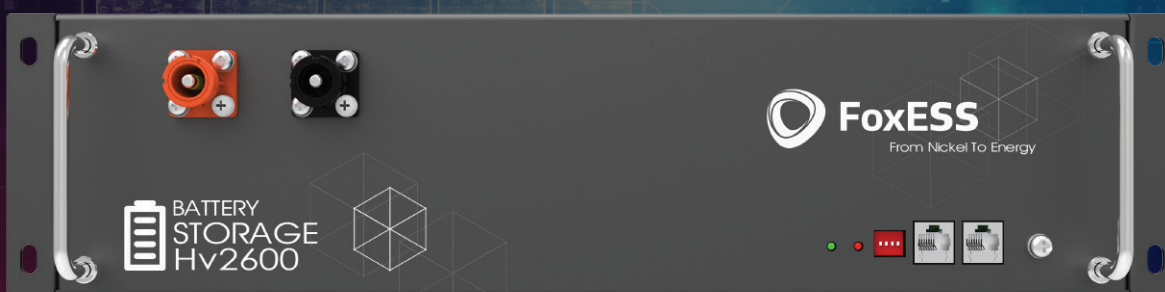

The HV2600 is a high-performance, scalable battery storage module. The modular design allows for maximum flexibility, making it suitable for a broad range of storage applications.

Additional batteries can be installed in series, allowing for a maximum storage capacity of 20.48kWh. Installation is easy, with a plug and play solution that can save valuable time for installers.



- 2.56kWh Capacity
- Scalable to 20.48 kWh
- 90% Depth of Discharge
- Wide Temperature Tolerance
- Easy Installation
- CAN/RS485 Communication
- High Voltage



**High Voltage**



**Easy Installation**



**High Efficiency**



**Expandable System**



**90% DoD**

# FoxESS HV2600

## BATTERY MODULE

Model	HS5.2	HS7.8	HS10.4	HS13	HS15.6	HS18.2	HS20.8
Battery Type	LiFePO4 Prismatic Cell						
Battery Module	1*BMS BOX HV 2*HV2600	1*BMS BOX HV 3*HV2600	1*BMS BOX HV 4*HV2600	1*BMS BOX HV 5*HV2600	1*BMS BOX HV 6*HV2600	1*BMS BOX HV 7*HV2600	1*BMS BOX HV 8*HV2600
Nominal Capacity [Wh]	5120	7680	10240	12800	15360	17920	20480
Nominal Voltage [V]	102.4	153.6	204.8	256	307.2	358.4	409.6
Operating Voltage [V]	80 - 116.8	120 - 175.2	160 - 233.6	200 - 292	240 - 350.4	280 - 408.8	320 - 467.2
Recommend Discharge Current [A]	25						
Max.Charge/Discharge Current [A]	50						
Peak Discharge Current [A]	65A @30sec						
Battery Pack Round-Trip Efficiency	>95%						
Depth of discharge	90%						
Cycle Life	≥6000 <sup>*1</sup>						
Communication	CAN, RS485						
Display	HV 2600: LED*2, BMS BOX HV: LED*7						
Scalability	Max. 8 Modules in Series						
Installation Location	Indoor (Stand)						
Operating Temperature [°C]	-10 - 50						
Storage Temperature [°C]	-20 - 50						
Cooling method	Natural Convection						
Humidity	5% to 85% (No Condensing)						
Altitude (m)	Max. 2,000						
Dimensions (W*H*D) [mm] [BMS BOX HV]	420*116*480						
Weight [kg] [BMS BOX HV]	4.5						
Dimensions (W*H*D) [mm] [HV2600] <sup>*2</sup>	420*116*480						
Weight [kg] [HV2600] <sup>*2</sup>	29.7±1						
Safety	IEC 62619						
EMC	EN IEC 61000-6-1/2/3/4						
Transportation	UN38.3						
Ingress Protection	IP21						

\*1 25°C, @90% DOD, 0.5C charging/discharging

\*2 Bare weight and dimensions for 1 pcs HV2600, excluding cables and brackets